




HOLMES TRAILERS

Residential and Commercial Utility Trailers • Car and Low Profile Equipment Haulers

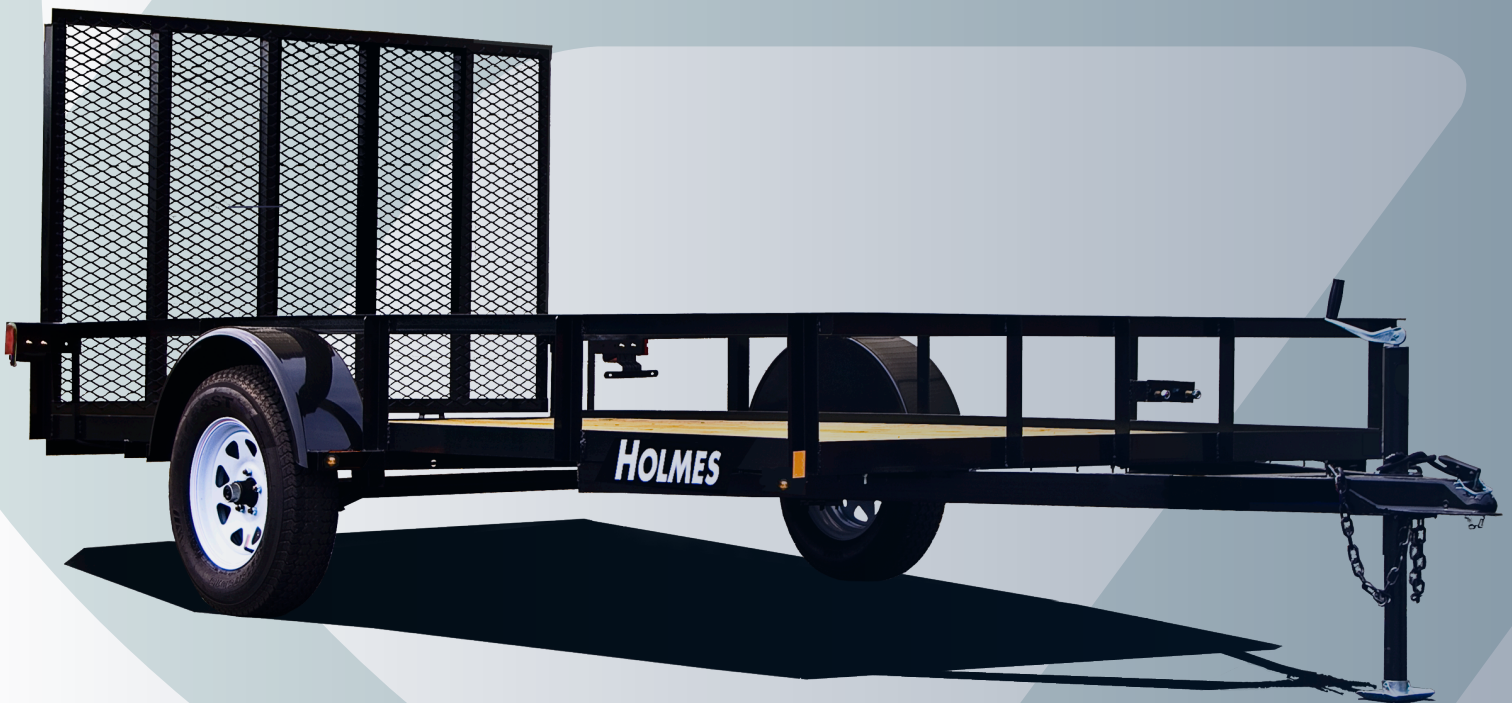

QUALITY. DURABILITY. VALUE.

The Six Point Difference.

Above all else, we take pride in manufacturing trailers of the highest quality for both the homeowner and business owner alike. No matter which model you choose, a Holmes Trailer will give you the confidence to enjoy the ride, while getting the job done.

Purchasing a trailer is a big decision - whether buying your first or expanding your existing fleet. When it comes to evaluating your options, it's important to consider options beyond value - such as solid engineering and design, convenience of use, component durability, safety, and customer service.

To help with your decision, we've highlighted six key features that make a Holmes Trailer stand out from the competition.

Please refer to the following pages to see which standard features, options, and upgrades are available for each model.

1

Heavy Duty Engineering

$\frac{3}{16}$ " Angle Cross Members

To support those heavier loads, we use $\frac{3}{16}$ " angle cross members, as opposed to the standard $\frac{1}{8}$ " angle.

$\frac{1}{4}$ " Angle Frame

Our trailers are constructed with a $\frac{1}{4}$ " angle frame, enabling miles upon miles of heavy duty use.

4" Channel Tongue

Another big step up in strength and durability compared to the competition is our use of a 4" channel for the tongue.

Diamond Plate Fenders

Our powder coated, diamond plate fenders provide a durable surface.

LED High Mount Lights

Our tail lights are mounted higher on a protective cover plate for better visibility and increased safety.

2

Convenience & Innovation

Spring Assist Gates

Repeatedly lifting and lowering a gate is time consuming as well as hard on the back. These gates are a convenient, low cost option available on many of our models.

Spring Loaded Gate Latches

Don't worry about lost pins or poor fitting gates. Our spring latch system will give you a smooth opening and closing plus unparalleled convenience.

Spare Tire Mount

Don't let a flat tire ruin your day. Our standard spare tire mount allows you to easily carry and change a tire when unexpected problems occur.

EZ Lube Axles

The hubs on these axles make basic maintenance a breeze. Just remove the plug and use the grease zirk to keep your trailer running smooth.

3

Durability

Fully Sealed Wiring Harness System

Wiring issues are among the top concerns we hear about from potential customers. To address, all Holmes Trailers are outfitted with our fully sealed wiring harness, including sealed lighting connections, to help protect your trailer from the everyday elements and road debris.

Board Caps for Deck (Bolted Bay on Front)

Each deck board is installed under a board cap (the front and rear bumper). This keeps the ends of the board from “curling” and lifting from the frame.

Pressure Treated Lumber

For a long lasting deck, we use pressure treated lumber for increased longevity and protection against the elements.

Abrasive Blasted and Powder Coated Finish

Our two-step finishing process helps prevent the buildup of corrosion and rust frequently found on conventionally painted frames. Every Holmes Trailer is first blasted with steel shot abrasive to remove contaminants (such as grease and/or mill scale) and prepare the frame to accept a solid finish. To complete the process, the frame is then powder coated from top to bottom.

A powder coated finish is far superior to that of liquid paint, as it provides a high gloss finish as well as increased durability.

4

Customer Service

Exclusive Dealer Network

The same commitment to excellence we put in designing and fabricating our trailers can be seen in each one of our authorized dealers. Every Holmes Trailer Dealer is committed to providing outstanding customer service and possesses an extensive knowledge of the Holmes product line.

Three Year Frame / One Year Limited Warranty

All Holmes Trailers come with a 3 year frame warranty and a 1 year limited warranty.

5

Safety

NATM Compliant

Holmes Trailers is dedicated to making the safest trailers available in the industry. Following the guidelines of the National Association of Trailer Manufacturers, we meet or exceed all NATM and Department of Transportation requirements for highway safety.

All Model LED Lighting

Not just the tail lights, but every light on each one of our models is LED. You will benefit from the safety and longevity provided by LED lights.

6

Options and Upgrades

Holmes Trailers offers an extensive selection of options and upgrades for our trailers. Please refer to the detailed model information on the following pages to see the specific options available for each of our models.

Residential Utility. Offering ALL LED lighting on every model - high end features, great value.

Standard Features

Single and Tandem Axle

- Powder coated frame
- Spare tire mounting bracket
- Four foot gate with spring latches
- EZ lube axles
- Smooth fenders
- 2k jack with sand foot
- Treated no. 2 yellow pine floors
- High mount tail lights
- Rail or mesh sides
- All LED lighting
- Fully enclosed wiring harness

Options & Upgrades

Single and Tandem Axle

- Spare tire
- D Rings
- Stake pockets

Tandem Axle Only

- Second brake axle • 7k models



Photo: R 6-4x12 Residential Series
Single Axle Rail Utility Model

Residential Utility Line. Offering the same great value Holmes Trailers has become known for over the years, without skimping on features. Every model comes fully equipped with LED lighting and our fully sealed wiring harness, in addition to a spare tire mount, spring gate latches, high mounted tail lights, EZ lube axles, and a powder coated frame.

Model Selection

	Width	Length	GVWR	Payload
Single Axle	4'	6'	2k	1550
		8'	2k	1500
	5'	8'	2k	1400
		8'	3.5k	2190
		10'	3.5k	2140
		12'	3.5k	2090
	6'4"	10'	3.5k	1970
		12'	3.5k	1870
Tandem Axle	6'4"	12'	7k	5600
		14'	7k	5450
		16'	7k	5350

Payload denotes GVWR minus estimated empty weight of trailer.





Photo: C 6-4x12 Commercial Series
Single Axle Mesh Utility Model

Model Selection

	Width	Length	GVWR	Payload
Single Axle	5'	8'	2k	1356
		8'	3.5k	2066
		10'	3.5k	1976
		12'	3.5k	1901
		14'	3.5k	1836
	5'6"	8'	3.5k	1940
		10'	3.5k	1870
		12'	3.5k	1820
		14'	3.5k	1715
	6'4"	10'	3.5k	1765
		12'	3.5k	1740
		14'	3.5k	1540
	Tandem Axle	6'10"	12'	7k
14'			7k	5270
16'			7k	5172
18'			7k	5070
18'			10k	7700
20'			10k	7480

Payload denotes GVWR minus estimated empty weight of trailer.

Single Axle Commercial Model.

All Holmes commercial models come standard with value-adding options such as LED lighting, tube railings, diamond plate fenders, and our fully sealed wiring harness.

Options & Upgrades

Single and Tandem Axle

Adjustable coupler or pintle

7k dropleg jack • 2k, 3.5k, 7k models

Spare tire

Lockable tongue box

D rings

Stake pockets

3' and 4' sides • 10', 12', 14', 16' models

Spring assist gates

Single Axle Only

3.5k idler axle to 3.5k brake axle

3.5k idler axle to 5k idler axle

3.5k idler axle to 5k brake axle

Tandem Axle Only

Second brake axle • 7k models

7k GVWR to 10k GVWR • 7k models

Commercial Utility. One of the hardest working trailers on the market today.

Standard Features

Single and Tandem Axle

- Fully sealed wiring harness
- Powder coated frame
- Full LED lighting
- Spare tire mounting bracket
- Diamond plate jeep style fenders
- 4' gate with spring latches
- Steel tube rails
- Treated no. 2 yellow pine floors
- EZ lube axle
- Rail, mesh, or plate sides

Single Axle Only

- 2k jack with sand foot

Tandem Axle Only

- Rear split gates • heavy duty 3lb grating
- Upgraded breakaway kit
- 2k jack with sand foot • 7k models
- 7k dropleg jack • 10k models

Tandem Axle Commercial Model.

The professional and weekend warrior alike will appreciate the heavy duty features that make our Commercial Utility Tandem Axle model one of our top sellers. These versatile trailers offer a solid and dependable trailer for those jobs that require more size and bulk hauling capabilities.



Photo: C 6-10x14 Commercial Series
Tandem Axle Mesh Utility Model

Low Profile Equipment Haulers. Engineered to provide years of trouble free service.



Photo: LPE 6-10x18 Low Profile Equipment Hauler with Flip Up Ramps

Model Selection

	Width	Length	GVWR	Payload
Car Haulers	6'10"	16'	7k	5100
		16'	10k	7750
		18'	7k	4900
		18'	10k	7570
Low Profile Equipment Haulers	6'10"	16'	7k	5370
		18'	7k	5000
		18'	10k	7700
		18'	12k	9750
		20'	10k	7500
		20'	12k	9550
		20'	14k	11500

Payload denotes GVWR minus estimated empty weight of trailer.

Low Profile Equipment Haulers.

The heavy duty construction and durability you need to get the job done. Built with attention to detail, all Holmes Low Profile Equipment models will provide years of reliable service.

Car Haulers. More cross members for added strength.

Options & Upgrades

Car Hauler and Low Profile Equipment Haulers

- Spare tire
- Adjustable coupler or pintle
- 7k dropleg jack • 7k models
- Winch plate
- Lockable tongue box
- Second brake axle • 7k models

Low Profile Equipment Hauler Only

- Spring assist ramp
- Straight tail option

Standard Features

Car Hauler and Low Profile Equipment Hauler

- Fully sealed wiring harness
- Powder coated frame
- Full LED lighting
- Rub rails with stake pockets
- D rings
- Spare tire mounting bracket
- Diamond plate jeep style fenders
- 2k jack with sand foot • 7k and 10k models
- 7k dropleg jack • 12k and 14k models

Car Hauler Only

- Full diamond plate deck
or open center split deck
- 5' fully adjustable slide in diamond plate ramps

Low Profile Equipment Hauler Only

- All channel frame
- Treated no. 2 yellow pine floors
- 5' fully adjustable flip up ramps
- 2k jack with sand foot • 7k and 10k models
- 7k dropleg jack • 12k and 14k models

Car Haulers.

Don't trust your ride to just any trailer. Engineered to the highest specifications and constructed of heavy duty materials, Holmes Car Haulers are available in full plate or open deck models and feature more cross members for additional strength and stability.

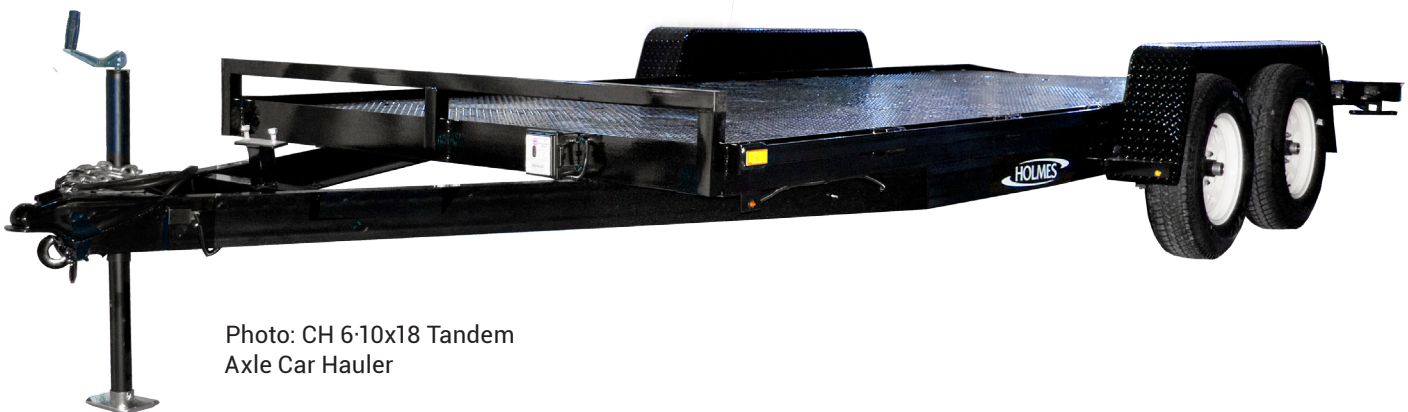


Photo: CH 6-10x18 Tandem Axle Car Hauler

Model Specifications.

Residential Utility Line

	Model	Frame	Cross Members	Tounge	EZ Lube Axle	Jack	Coupler	Tires	GVWR	Empty Weight	Payload
Single Axle	R 4x6 2k	2x2x $\frac{1}{8}$ angle	2x2x $\frac{1}{8}$ angle	3x2x $\frac{1}{4}$ angle	2k	2k sand foot	2"	4.80-12	2000	450	1550
	R 4x8 2k	2x2x $\frac{1}{8}$ angle	2x2x $\frac{1}{8}$ angle	3x2x $\frac{1}{4}$ angle	2k	2k sand foot	2"	4.80-12	2000	500	1500
	R 5x8 2k	2x2x $\frac{1}{8}$ angle	2x2x $\frac{1}{8}$ angle	3" channel	2k	2k sand foot	2"	ST175/80/D13	2000	600	1400
	R 5x8 3.5k	3x2x $\frac{3}{16}$ angle	2x2x $\frac{1}{8}$ angle	3" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	800	2190
	R 5x10 3.5k	3x2x $\frac{3}{16}$ angle	2x2x $\frac{1}{8}$ angle	3" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	850	2140
	R 5x12 3.5k	3x2x $\frac{3}{16}$ angle	2x2x $\frac{1}{8}$ angle	3" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	900	2090
	R 6-4x10 3.5k	3x2x $\frac{3}{16}$ angle	2x2x $\frac{3}{16}$ angle	3" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1020	1970
	R 6-4x12 3.5k	3x2x $\frac{3}{16}$ angle	2x2x $\frac{3}{16}$ angle	3" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1120	1870
Tandem Axle	R 6-4x12 7k	3x2x $\frac{1}{4}$ angle	3x2x $\frac{3}{16}$ angle	4" channel	2x3.5k	2k sand foot	2 $\frac{5}{16}$ "	ST205/75/D15	7000	1400	5600
	R 6-4x14 7k	3x2x $\frac{1}{4}$ angle	3x2x $\frac{3}{16}$ angle	4" channel	2x3.5k	2k sand foot	2 $\frac{5}{16}$ "	ST205/75/D15	7000	1550	5450
	R 6-4x16 7k	3x2x $\frac{1}{4}$ angle	3x2x $\frac{3}{16}$ angle	4" channel	2x3.5k	2k sand foot	2 $\frac{5}{16}$ "	ST205/75/D15	7000	1650	5350

Model Specifications.

Commercial Utility Line

	Model	Frame	Cross Members	Tounge	EZ Lube Axle	Jack	Coupler	Tires	GVWR	Empty Weight	Payload
Single Axle	C 5x8 2k	2x2x ³ / ₁₆ angle	2x2x ³ / ₁₆ angle	3" channel	2k	2k sand foot	2"	ST175/80/D13	2000	644	1356
	C 5x8 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	924	2066
	C 5x10 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1014	1976
	C 5x12 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1089	1901
	C 5x14 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1154	1836
	C 5-6x8 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1050	1940
	C 5-6x10 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1120	1870
	C 5-6x12 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1170	1820
	C 5-6x14 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1275	1715
	C 6-4x10 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1225	1765
	C 6-4x12 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1250	1740
C 6-4x14 3.5k	3x2x ¹ / ₄ angle	2x2x ³ / ₁₆ angle	4" channel	3.5k	2k sand foot	2"	ST205/75/D15	2990	1450	1540	
Tandem Axle	C 6-10x12 7k	3x2x ¹ / ₄ angle	3x2x ¹ / ₄ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1630	5370
	C 6-10x14 7k	3x2x ¹ / ₄ angle	3x2x ¹ / ₄ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1730	5270
	C 6-10x16 7k	3x5x ¹ / ₄ angle	3x2x ¹ / ₄ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1828	5172
	C 6-10x18 7k	3x5x ¹ / ₄ angle	3x2x ¹ / ₄ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1930	5070
	C 6-10x18 10k	3x5x ¹ / ₄ angle	3x2x ¹ / ₄ angle	6" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2300	7600
	C 6-10x20 10k	3x5x ¹ / ₄ angle	3x2x ¹ / ₄ angle	6" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2520	7380

Model Specifications.

Car Haulers

	Model	Frame	Cross Members	Tounge	EZ Lube Axles	Jack	Coupler	Tires	GVWR	Empty Weight	Payload
Car Haulers	CH 6·10x16 7k	3x5x¼ angle	3x2x¼ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1900	5100
	CH 6·10x16 10k	3x5x¼ angle	3x2x¼ angle	5" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2150	7750
	CH 6·10x18 7k	3x5x¼ angle	3x2x¼ angle	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	2100	4900
	CH 6·10x18 10k	3x5x¼ angle	3x2x¼ angle	5" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2330	7570

Model Specifications.

Low Profile Equipment Haulers

	Model	Frame	Cross Members	Tounge	EZ Lube Axles	Jack	Coupler	Tires	GVWR	Empty Weight	Payload
Low Profile Equipment Haulers	LPE 6-10x16 7k	5" channel	3" channel	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	1630	5370
	LPE 6-10x18 7k	5" channel	3" channel	5" channel	2x3.5k	2k sand foot	2 ⁵ / ₁₆ "	ST205/75/D15	7000	2000	5000
	LPE 6-10x18 10k	6" channel	3" channel	6" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2200	7700
	LPE 6-10x18 12k	6" channel	3" channel	6" channel	2x6k	7k drop leg	2 ⁵ / ₁₆ " adj	ST235/85/R16	12000	2250	9750
	LPE 6-10x20 10k	6" channel	3" channel	6" channel	2x5.2k	2k sand foot	2 ⁵ / ₁₆ "	ST225/75/R15	9900	2400	7500
	LPE 6-10x20 12k	6" channel	3" channel	6" channel	2x6k	7k drop leg	2 ⁵ / ₁₆ " adj	ST235/85/R16	12000	2450	9550
	LPE 6-10x20 14k	6" channel	3" channel	6" channel	2x7k	7k drop leg	2 ⁵ / ₁₆ " adj	ST235/85/R16	14000	2500	11500

Your Holmes Trailer Dealership

The same commitment to excellence we put into designing and building every Holmes Trailer is mirrored by each member of our exclusive Dealer network. Numbering more than fifty and spanning the East Coast, every Holmes Trailer Dealer is committed to providing outstanding customer service and possesses extensive knowledge of the Holmes product line.

Visit our website today and use our Find a Dealer tool to locate the dealership closest to you.



www.holmestrailers.com